

Pressure Injectable PICC Set with Blue FlexTip® Catheter

and 130 cm Platinum Tipped, Stainless Steel Marked Wire

Distal Lur

REF PR-34063-HPSL

Contents:

- 1: Multi-Lumen Indwelling Catheter: 6 Fr. x 40 cm Radiopaque **Pressure Injectable** Polyurethane with Blue FlexTip®, Extension Line Clamps and **Protection Sleeve**
- 2 1: Peel-Away Sheath: 13 Ga. x 4" (10 cm) Radiopaque over 6.5 Fr. Dilator
- 3 1: Spring-Wire Guide, Marked: .018" (0.46 mm) dia. x 51-3/16" (130 cm) (Straight Soft Tip on One End -Straight Stiff Tip on Other)
- 4 1: Spring-Wire Guide: .018" (0.46 mm) dia. x 17-3/4" (45 cm) (Straight Soft Tip on Both Ends)
- (5) 1: Introducer Needle: Echogenic 21 Ga. x 2-3/4" (7 cm) TW
- ⑤ 1: Syringe: 5 mL Luer-Lock
 - 1: Foil-Laminated Pouch 79% Skin Protectant **Prep Pad**
 - 3: Dust Caps: Non-Vented
- ① 1: Clamp: Catheter
- 8 1: Fastener: Catheter Clamp
 - 1: Chart Sticker
 - 1: Checklist/CLIP Sheet
 - 1: Patient ID Card
 - 1: Patient Information Booklet
- 9 1: Dressing: STATLOCK®1 Catheter Stabilization Device
 - 1: Paper Tape Measure
- 1: Flow Rate Information Card with Injection Log

¹ A registered trademark of C. R. Bard, Inc.













by ethylene oxide

STERILE EO

Do not use if package is damaged







resterilize


Consult instructions for use


Rx only. Warning: Read all package insert warnings, precautions, and instructions prior to use. Failure to do so may result in severe patient injury or death.

Sterile. Fluid path components are non-pyrogenic. Contains no medication.



2400 Bernville Road Reading, PA 19605 USA www.arrowintl.com

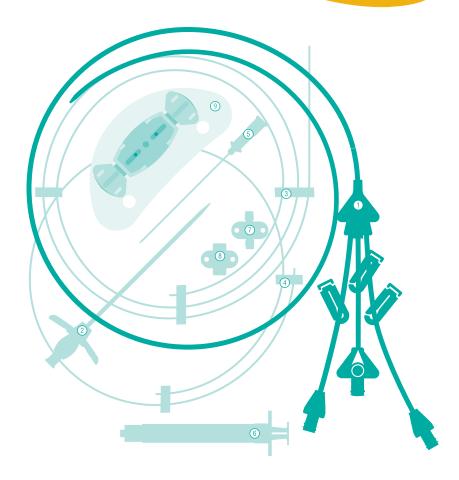



Lumen	Priming Volume* (mL)	Flow Rate [†] (mL/hr)	Pump Flow Rate [‡] (mL/hr)	MAX Pressure Injectable Flow Rate** (mL/sec)S
Distal (17 Ga.)	0.60	1650	7526	6
Medial (19 Ga.)	0.40	550	2736	not rated
Proximal (19 Ga.)	0.43	550	2760	not rated

- * Priming volumes are approximate and are done without injection caps
- † Flow rates were determined using room temperature water, 100 cm head height and represent approximate flow capabilities.
- * Pump flow rates are determined at maximum pump pressure of 10 psig and represent approximate flow capabilities.
- **Pressure injection flow rates are determined at the injector pressure setting of 300 psi maximum using media of 11.8 centipoise viscosity, with 152 cm pressure tubing

IR-34063-101C (6/16)





catheter

inch dia.



