

Pressure Injectable PICC Set with Blue FlexTip® Catheter

and 130 cm Platinum Tipped, Stainless Steel Marked Wire Distal Lumen Arrow® VPS™ compatible

REF PR-35063-HPSL

Contents:

- ① 1: Multi-Lumen Indwelling Catheter: 6 Fr. x 50 cm Radiopaque **Pressure Injectable** Polyurethane with Blue FlexTip®, Extension Line Clamps and Protection Sleeve
- ② 1: Peel-Away Sheath: 13 Ga. x 4" (10 cm) Radiopaque over 6.5 Fr. Dilator
- ③ 1: Spring-Wire Guide, Marked: .018" (0.46 mm) dia. x 51-3/16" (130 cm) (Straight Soft Tip on One End -Straight Stiff Tip on Other)
- 4 1: Spring-Wire Guide: .018" (0.46 mm) dia. x 17-3/4" (45 cm) (Straight Soft Tip on Both Ends)
- (5) 1: Introducer Needle: Echogenic 21 Ga. x 2-3/4" (7 cm) TW
- ⑤ 1: Syringe: 5 mL Luer-Lock
 - 1: Foil-Laminated Pouch 79% Skin Protectant Prep Pad
 - 3: Dust Caps: Non-Vented
- ① 1: Clamp: Catheter
- 8 1: Fastener: Catheter Clamp
 - 1: Chart Sticker
 - 1: Checklist/CLIP Sheet
 - 1: Patient ID Card
 - 1: Patient Information Booklet
- T: Dressing: STATLOCK®1
 Catheter Stabilization Device
 - 1: Paper Tape Measure
- 1: Flow Rate Information Card with Injection Log

¹ A registered trademark of C. R. Bard, Inc.



Caution Do not



Do not resterilize



by ethylene oxide



Do not use if package is damaged



natural rubber latex




Consult instructions for use

Rx only. Warning: Read all package insert warnings, precautions, and instructions prior to use. Failure to do so may result in severe patient injury or death.

Sterile. Fluid path components are non-pyrogenic. Contains no medication



2400 Bernville Road Reading, PA 19605 USA www.arrowintl.com

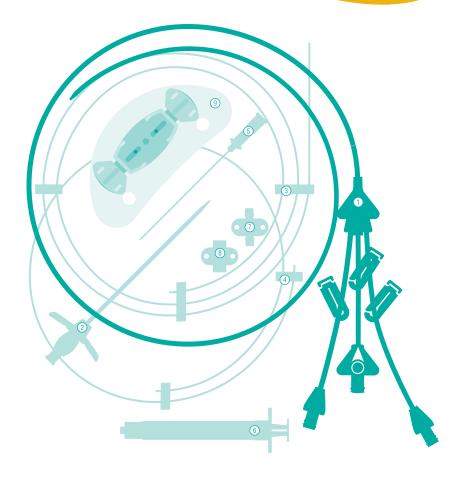



Catheter	Cross 9	ection
Catheter	CIUSS J	ection

Priming Volume* (mL)	Flow Rate [†] (mL/hr)	Pump Flow Rate [‡] (mL/hr)	MAX Pressure Injectable Flow Rate** (mL/sec)
0.65 0.45	1320 450	6765 2597	6 not rated not rated
	Volume* (mL) 0.65 0.45	Volume* Rate [†] (mL) (mL/hr) 0.65 1320 0.45 450	Volume* (mL) Rate† (mL/hr) Rate‡ (mL/hr) 0.65 1320 6765

- * Priming volumes are approximate and are done without injection caps
- † Flow rates were determined using room temperature water, 100 cm head height and represent approximate flow capabilities.
- * Pump flow rates are determined at maximum pump pressure of 10 psig and represent approximate flow capabilities.
- **Pressure injection flow rates are determined at the injector pressure setting of 300 psi maximum using media of 11.8 centipoise viscosity, with 152 cm pressure tubing.

IR-35063-101C (6/16)





5 Fr. 3 Lu

 $50^{\rm cm}_{
m length}$

.018 inch dia. spring-wire guide

